

## LPFC4

### Features

- ◆ Install into stainless steel sheets HRB 88 or less.
- ◆ Fully concealed-head for tool only access.
- ◆ Assorted screw lengths for most applications.




УНИФИЦИРОВАННЫЙ/единица измерения: Дюйм

Thread Size	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +.003 - .000	C Max.	E ± .010	G ± .016	P ± .025	T <sub>1</sub> Max.	T <sub>2</sub> Nom.	Driver Size	Min. Dist Hole C/L To Edge
.112-40 (#4-40)	LPFC4	440	40	.060	.060	.265	.264	.344	.250	.000	.370	.540	#1	.25
			62						.375	.125				
.138-32 (#6-32)	LPFC4	632	40	.060	.060	.281	.280	.375	.250	.000	.380	.540	#2	.28
			62						.375	.125				
			84						.500	.250				
.164-32 (#8-32)	LPFC4	832	50	.060	.060	.312	.311	.406	.312	.000	.480	.705	#2	.31
			72						.437	.125				
			94						.562	.250				
.190-32 (#10-32)	LPFC4	032	50	.060	.060	.344	.343	.437	.312	.000	.490	.705	#2	.34
			72						.437	.125				
			94						.562	.250				

МЕТРИКА ISO/единица измерения: мм

Thread Size x Pitch	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet + 0.08	C Max.	E ± 0.25	G ± 0.4	P ± 0.64	T <sub>1</sub> Max.	T <sub>2</sub> Nom.	Driver Size	Min. Dist Hole C/L To Edge
M3X0.5	LPFC4	M3	40	1.53	1.53	6.73	6.71	8.74	6.4	0	9.4	13.72	#1	6.35
			62						9.5	3.2				
M4X0.7	LPFC4	M4	50	1.53	1.53	7.92	7.9	10.31	7.9	0	12.19	17.91	#2	7.87
			72						11.1	3.2				
			94						14.3	6.4				
M5X0.8	LPFC4	M5	50	1.53	1.53	8.74	8.72	11.1	7.9	0	12.45	17.91	#2	8.63
			72						11.1	3.2				
			94						14.3	6.4				

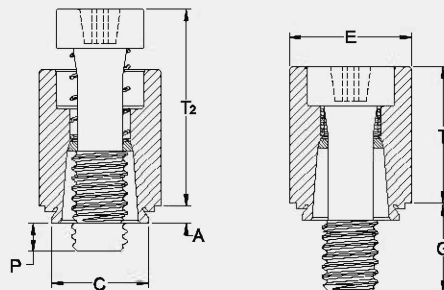

### Part Number Designation

LPFC4 - 832 - 50

Type                      Thread Code                      Screw Length Code